

## NU Series Self Contained Dice Ice Machines – up to 68kg

**NU 150 AS** Full dice cube 10g, 22mm x 22mm x 22mm



Full dice cube 10 g  
W 22 x D 22 x H 22 mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 68kg daily production rate
- 20kg storage bin capacity
- Air cooled version
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Vertical evaporator spray-system technology
- Front-in and front-out air flow designed for placement in tight spaces
- Ergonomic access to ice with sliding disappearing door
- One touch cleaning for time and labour saving
- Resistant stainless steel exterior
- Easy access front condenser air filter
- Routine maintenance visible alarm light on front panel
- Includes removable air filter, ice scoop, water and drain hose



### NU Series Self Contained Dice Ice Machines – up to 68kg

#### NU 150 AS

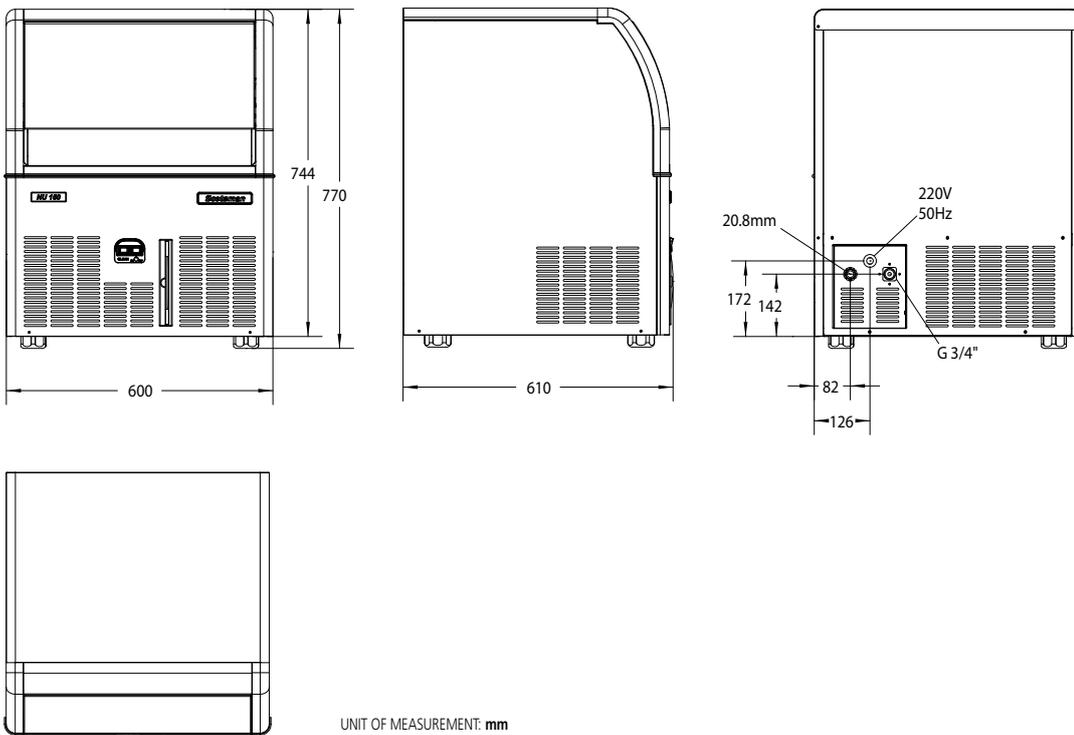

UNIT OF MEASUREMENT: mm



moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 100 AS	85	68	48

#### Dimensions

Width: 600mm  
Depth: 610mm  
Height: 770mm (including legs)  
Nett weight: 50kg  
Packed weight: 62kg

#### Water consumption

Air cooled version: 3.9 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 500W,  
10A cordset supplied  
No. Circuit wire: 3  
Compressor: 990W  
Energy consumption: 10.8kW/hr

#### Refrigerant type

R404a

#### Installation distance from wall

Rear 100mm  
Sides 10mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R ¾"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø ¾"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.1801